



# Driver Monitoring Systems (DMS) and Occupant Monitoring Systems


Last Updated: May 25, 2022

The driving monitoring system includes a camera-based driver monitoring systems (DMS) pointed at the driver's face which provides a real-time evaluation of the presence and the state of the driver. DMS can help provide alerts to the driver and initiate an intervention to manage the control of the vehicle. The driver monitoring system ensures that the driver is prepared to take control of the vehicle when the situation dictates.

Beyond the driver, occupant monitoring systems can be valuable to understand their condition and even to provide a tailored environment specific to an identified occupant.

NXP offers dedicated silicon solutions for both driver monitoring system and occupant monitoring systems.

## Driver Monitoring System Block Diagram

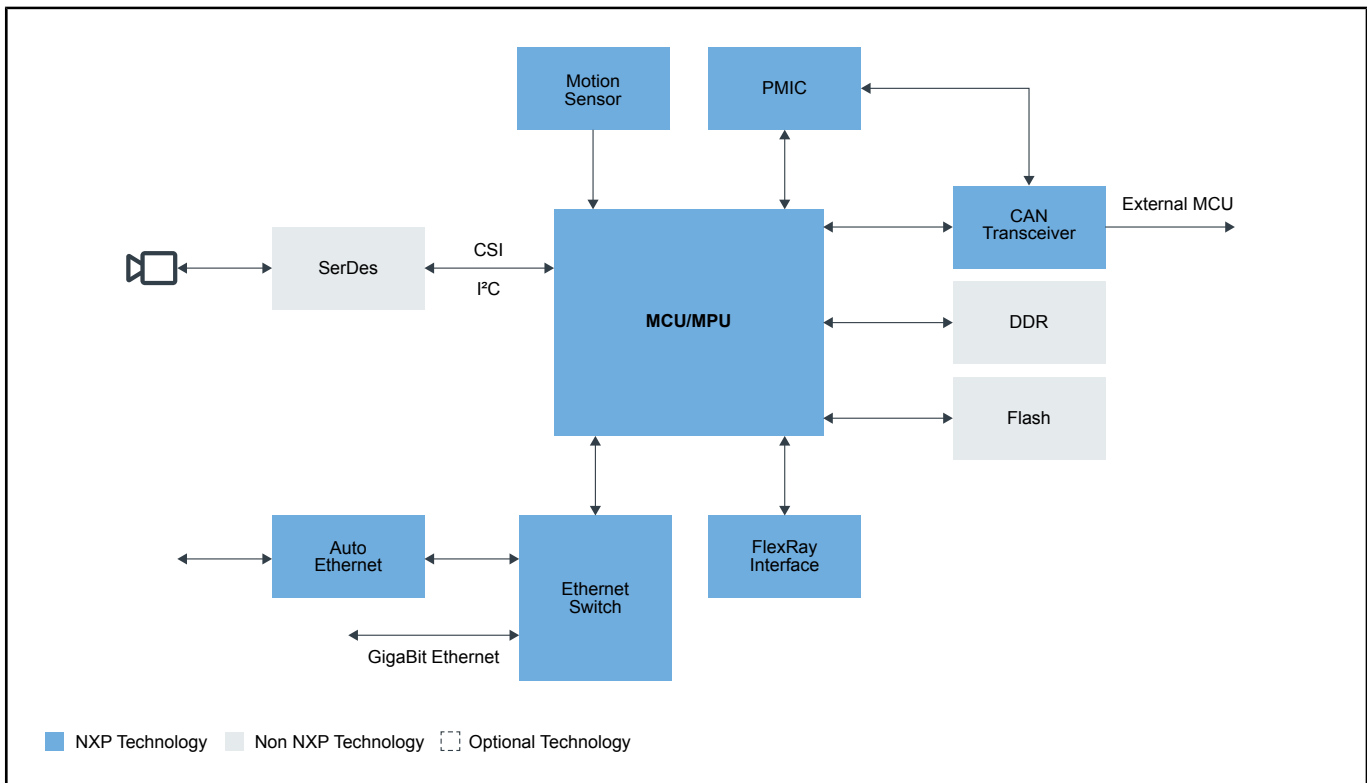

Recommended Products for Driver Monitoring System	
MCU/MPU	<ul style="list-style-type: none"> <li>• <a href="#">S32V234</a>: S32V2 Processors for Vision, Machine Learning and Sensor Fusion</li> </ul>
PMIC	<ul style="list-style-type: none"> <li>• <a href="#">FS5600</a>: Automotive Dual Buck Regulator and Controller with Voltage Monitors and Watchdog Timer</li> <li>• <a href="#">PCA9452</a>: PCA9452 i.MX 93x車載プロセッサ用パワー・マネジメントIC</li> <li>• <a href="#">PF8100_PF8200</a>: <a href="#">Power Management Integrated Circuit (PMIC) for high-performance processing applications</a>: 12-Channel Power Management Integrated Circuit (PMIC) for High-Performance Processing Applications</li> <li>• <a href="#">FS8400</a>: Safety System Basis Chip for S32 Microcontrollers, Fit for ASIL B</li> <li>• <a href="#">PF7100</a>: 7-Channel Power Management Integrated Circuit for High Performance Applications, Fit for ASIL B Safety Level</li> </ul>
Motion Sensor	<ul style="list-style-type: none"> <li>• <a href="#">FXLS8974CF</a>: ±2g/±4g/±8g/±16g, Low-Power 12-Bit Digital IoT Accelerometer</li> <li>• <a href="#">FXLS8964AF</a>: ±2g/±4g/±8g/±16g, Low-Power 12-Bit Digital Accelerometer</li> </ul>
CAN Transceiver	<ul style="list-style-type: none"> <li>• <a href="#">TJA1145A</a>: High Speed CAN Transceiver with Partial Networking, CAN FD Data Rates up to 5 Mbit/s</li> </ul>
Ethernet Switches	<ul style="list-style-type: none"> <li>• <a href="#">SJA1110</a>: Multi-Gig Safe and Secure TSN Ethernet Switch with Integrated 100BASE-T1 PHYs</li> </ul>
FlexRay Interface	<ul style="list-style-type: none"> <li>• <a href="#">TJA1080ATS</a>: <a href="#">FlexRay transceiver</a>: FlexRay Transceiver</li> </ul>
Auto Ethernet	<ul style="list-style-type: none"> <li>• <a href="#">TJA1120</a>: TJA1120、ASIL B準拠、車載用イーサネット1000BASE-T1 PHYトランシーバ</li> <li>• <a href="#">TJA1103</a>: TJA1103、ASIL B準拠車載イーサネット100BASE-T1 PHYトランシーバ</li> </ul>

View our complete solution for [Driver Monitoring Systems \(DMS\) and Occupant Monitoring Systems](#).

**Note:** The information on this document is subject to change without notice.

[www.nxp.com](http://www.nxp.com)

NXP and the NXP logo are trademarks of NXP B.V. All other product or service names are the property of their respective owners. The related technology may be protected by any or all of patents, copyrights, designs and trade secrets. All rights reserved. © 2024 NXP B.V.