


	© NXP SEMICONDUCTORS N.V. ALL RIGHTS RESERVED		MECHANICAL OUTLINE		PRINT VERSION NOT TO SCALE		
TITLE:	011700 4		DOCUMEN	NT NO: 98ASA10833D	REV: B		
ST	OM780-4 RAIGHT LEAD		STANDAF	RD: NON-JEDEC			
311(7(101	IV/VIOITI EE/VO		SOT1818	- 4	16 MAR 2016		



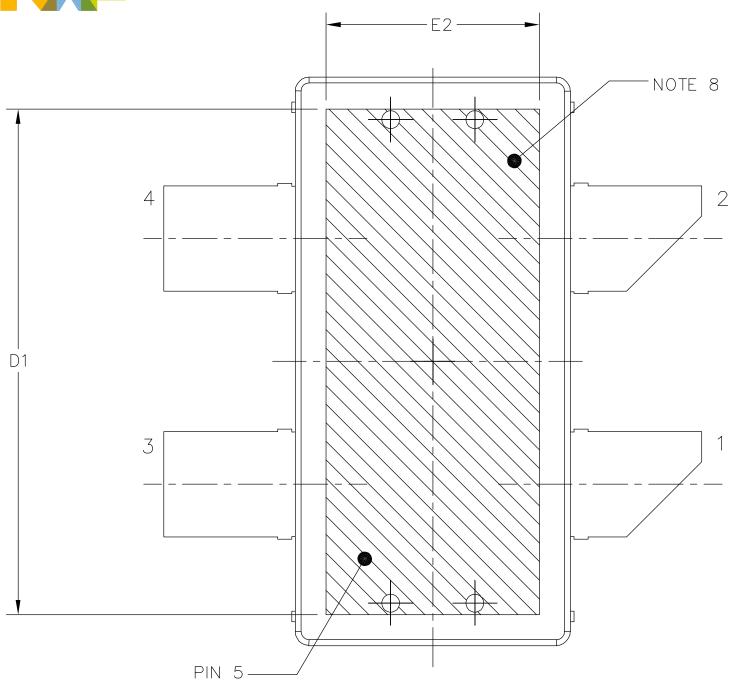

BOTTOM VIEW VIEW G-G

NXP SEMICONDUCTORS N.V. ALL RIGHTS RESERVED	MECHANICAL OUTLINE		PRINT VERSION NOT TO SCALE		
TITLE:		DOCUMEN	NT NO: 98ASA10833D	REV: B	
OM780-4 STRAIGHT LEAD		STANDARD: NON-JEDEC			
STRAIGHT ELAD		SOT1818	- 4	16 MAR 2016	



NOTES:

- 1. CONTROLLING DIMENSION: INCH
- 2. INTERPRET DIMENSIONS AND TOLERANCES PER ASME Y14.5M-1994.
- 3. DATUM PLANE -H- IS LOCATED AT TOP OF LEAD AND IS COINCIDENT WITH THE LEAD WHERE THE LEAD EXITS THE PLASTIC BODY AT THE TOP OF THE PARTING LINE.
- 4. DIMENSIONS "D" AND "E1" DO NOT INCLUDE MOLD PROTRUSION. ALLOWABLE PROTRUSION IS .006 PER SIDE. DIMENSIONS "D AND "E1" DO INCLUDE MOLD MISMATCH AND ARE DETERMINED AT DATUM PLANE -H-.
- 5. DIMENSION 6 DOES NOT INCLUDE DAMBAR PROTRUSION. ALLOWABLE DAMBAR PROTRUSION SHALL BE .005 TOTAL IN EXCESS OF THE 6 DIMENSION AT MAXIMUM MATERIAL CONDITION.
- 6. DATUMS -A- AND -B- TO BE DETERMINED AT DATUM PLANE -H-.
- 7. DIMENSION A1 APPLIES WITHIN ZONE "J" ONLY.
- 8. HATCHING REPRESENTS THE EXPOSED AREA OF THE HEAT SLUG. THE DIMENSIONS D1 AND E2 REPRESENT THE VALUES BETWEEN THE TWO OPPOSITE POINTS ALONG THE EDGES OF EXPOSED AREA OF HEAT SLUG.
- 9. DIMPLED HOLE REPRESENTS INPUT SIDE.

	INCH		MILLIMETER			INCH		MILLIMETER	
DIM	MIN	MAX	MIN	MAX	DIM	MIN	MAX	MIN	MAX
А	0.148	.152	3.76	3.86	b	.147	.153	3.73	3.89
A1	.059	.065	1.50	1.65	c1	.007	.011	0.18	0.28
D	.808	.812	20.52	20.62	е	.350 BSC		8.89 BSC	
D1	.720		18.29		e1	.721	.729	18.31	18.52
E	.762	.770	19.36	19.56					
E1	.390	.394	9.91	10.01	aaa	.004		0.10	
E2	.306		7.77						
E3	.383	.387	9.72	9.83					
F	.025 BSC		0.635 BSC						
	NIVE SEMICONDUCTORS N.V.								

© NXP SEMICONDUCTORS N.V. ALL RIGHTS RESERVED MECHANICAL OUTLINE PRINT VERSION NOT TO SCALE

TITLE: DOCUMENT NO: 98ASA10833D REV: B

OM780-4 STRAIGHT LEAD

STANDARD: NON-JEDEC

SOT1818-4 16 MAR 2016